




FTF MODELS

Flat Top Glass Frosters

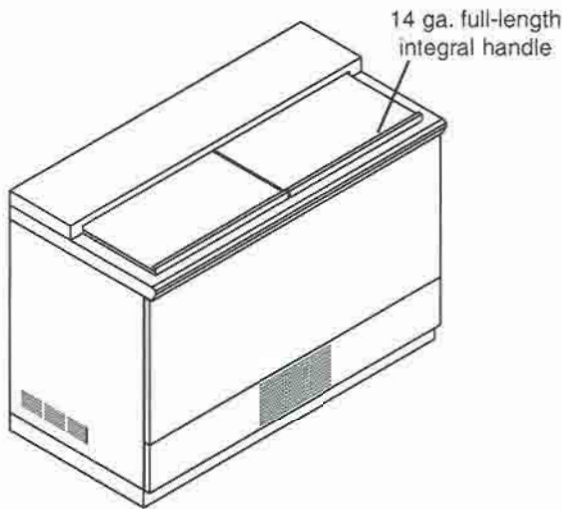

PROJECT _____
 ITEM NO. _____
 QTY. _____
 MODEL NO. _____

	LENGTH	DOORS	SELF-CONTAINED		REMOTE
			MODEL	ALL S/S	MODEL
<input type="checkbox"/>	24"	1	FTFS-24	FTFS-24AS	FTFR-24
<input type="checkbox"/>	36"	1	FTFS-36	FTFS-36AS	FTFR-36
<input type="checkbox"/>	48"	2	FTFS-48	FTFS-48AS	FTFR-48

STANDARD FEATURES


- **ALL WELDED CONSTRUCTION**
- **TOP** - 18 gauge #304 series 18-8 stainless steel.
- **EXTERIOR** - exterior front, sides, back and bottom are 20 gauge stainless steel.
- **INTERIOR** - liner is 20 gauge #304 stainless steel with 3/8 inch radius corner. Sanitation approved for open food containers.
- **DECORATIVE POLISHED BULLNOSE** - 18 gauge #304 s/s.
- **MEGABILT SLIDING LIDS** - all 14 gauge welded #304 18-8 stainless steel with polyurethane shot-in-place foam insulation. Lids easily slide open and closed with exclusive, centered, 14 gauge s/s integral pull with lifetime warranty. Locks provided.
- **BASE PLINTH** - 2-1/2" high 18 gauge #304 18-8 stainless steel base.
- **INSULATION** - 2" thick polyurethane shot-in-place foam (NO CFC's)
- **BREAKER STRIP** - Exclusive Foam-Locked breaker strip permanently installed without mechanical fasteners. Heater strip surrounds lid opening.
- **SELF-CONTAINED REFRIGERATION** - R-134A fully-balanced hermetic condensing unit is provided with evaporator coils with capillary tube, thermostat, condensate evaporator fan, frost free; auto defrost system automatically defrosts every four hours.
- **REMOTE MODELS** - include all of the above with the exception of condensing unit and condensate evaporator pan. Refrigeration, plumbing and electrical will be stubbed out at required location by specifying one of the following: LE-left end, RE-right end, BL-back left, BR-back right. Please specify refrigerant type.
- **INTERIOR LIGHT**

OPTIONS

- BS** -----backsplash
- CST** -----casters
- 6LG** -----6" x 1-5/8" stainless steel legs with adjustable bullet feet
- AS** -----all stainless steel construction
- BRS-(XX)**- Speed rail (XX=length in inches)
- M** -----customized

Model Number Guide


Use this guide to create the model specific to your needs.

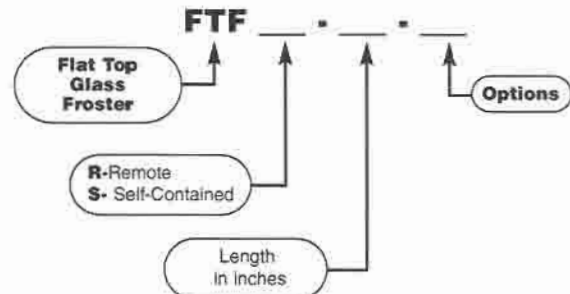




FTF MODELS


Flat Top Glass Frosters

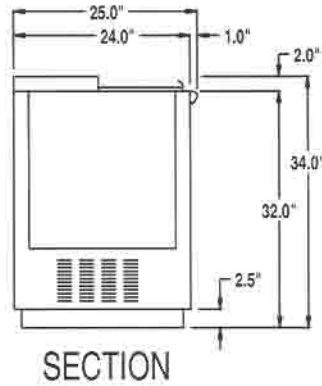


FTFS-24




FTFS-36

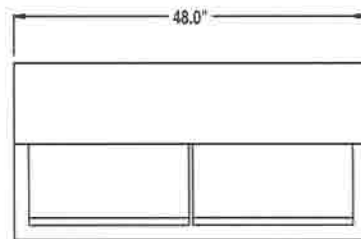


FTFS-48



ELEVATION



ELEVATION

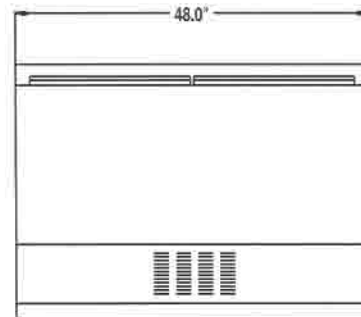

ELEVATION

REMOTE ALL S/S STD

MODEL	O.A. DIMENSIONS			GLASS CAP.	CMPSR. HP.	ELECTRICAL			SHIP WEIGHT	CUBE	
	LENGTH	DEPTH	HEIGHT			AMPS	VOLTAGE	PHASE			BTUs
FTFS-24	24"	25"	34-1/2"	80	1/4	7.5	115	SINGLE	—	185	15
FTFS-36	36"	25"	34-1/2"	153	1/3	7.8	115	SINGLE	—	260	22
FTFS-48	48"	25"	34-1/2"	185	1/3	7.8	115	SINGLE	—	335	29
FTFS-24AS	24"	25"	34-1/2"	80	1/4	7.1	115	SINGLE	—	185	15
FTFS-36AS	36"	25"	34-1/2"	153	1/4	7.1	115	SINGLE	—	260	22
FTFS-48AS	48"	25"	34-1/2"	185	1/3	9.5	115	SINGLE	—	335	29
FTFR-24	24"	25"	34-1/2"	120	—	—	—	—	—	1200	185
FTFR-36	36"	25"	34-1/2"	225	—	—	—	—	—	1300	260
FTFR-48	48"	25"	34-1/2"	250	—	—	—	—	—	1600	335