


VL SERIES



FTF MODELS

Flat Top Glass Frosters

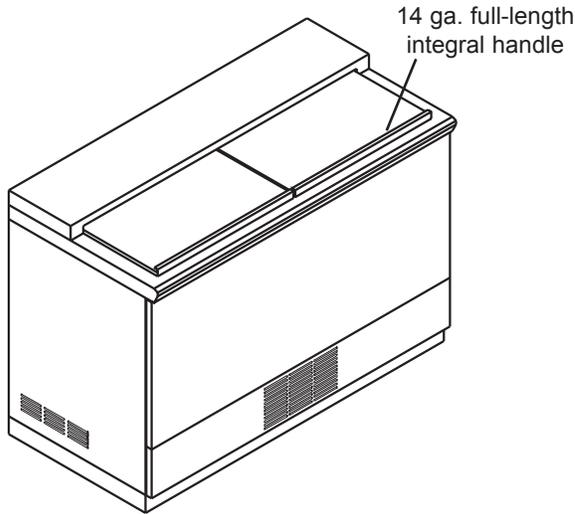

PROJECT _____
 ITEM NO. _____
 QTY. _____
 MODEL NO. _____

	LINE	LENGTH	DOORS	SELF-CONTAINED MODEL	REMOTE MODEL
<input type="checkbox"/>	VL	24"	1	FTFS-24	FTFR-24
<input type="checkbox"/>	VL	36"	1	FTFS-36	FTFR-36
<input type="checkbox"/>	VL	48"	2	FTFS-48	FTFR-48

STANDARD FEATURES


- ALL STAINLESS STEEL CONSTRUCTION
- ALL WELDED CONSTRUCTION
- TOP - 18 gauge #304 series 18-8 stainless steel.
- EXTERIOR - exterior front, sides, back and bottom are 20 gauge stainless steel.
- INTERIOR - liner is 20 gauge #304 stainless steel with 3/8 inch radius corner. Sanitation approved for open food containers.
- DECORATIVE POLISHED BULLNOSE - 18 gauge #304 s/s.
- MEGABILT SLIDING LIDS - all 14 gauge welded #304 18-8 stainless steel with polyurethane shot-in-place foam insulation. Lids easily slide open and closed with exclusive, centered, 14 gauge s/s integral pull with lifetime warranty. Locks provided.
- BASE PLINTH - 2-1/2" high 18 gauge #304 18-8 stainless steel base.
- INSULATION - 2" thick polyurethane shot-in-place foam (NO CFC's)
- BREAKER STRIP - Exclusive Foam-Locked breaker strip permanently installed without mechanical fasteners. Heater strip surrounds lid opening.
- SELF-CONTAINED REFRIGERATION - R-134A fully-balanced hermetic condensing unit is provided with evaporator coils with capillary tube, thermostat, condensate evaporator fan, frost free; auto defrost system automatically defrosts every four hours.
- REMOTE MODELS - include all of the above with the exception of condensing unit and condensate evaporator pan. Refrigeration, plumbing and electrical will be stubbed out at required location by specifying one of the following: LE-left end, RE-right end, BL-back left, BR-back right. Please specify refrigerant type.

OPTIONS

- CST ----- casters
- 6LG ----- 6" x 1-5/8" stainless steel legs with adjustable bullet feet
- BRS-(XX)- Speed rail (XX=length in inches)
- M----- customized

Model Number Guide

Use this guide to create the model specific to your needs.

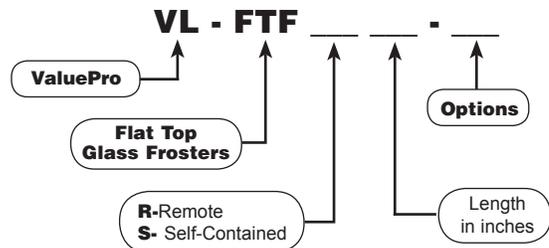


VL SERIES




FTF MODELS


Flat Top Glass Frosters

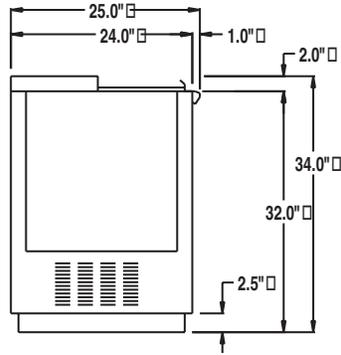


SECTION




FTFS-24




FTFS-36

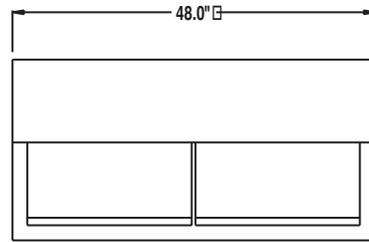


FTFS-48



ELEVATION



ELEVATION

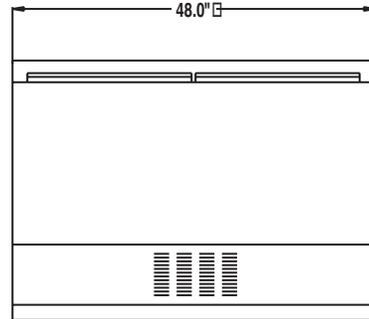

ELEVATION

		O.A. DIMENSIONS			GLASS	CMPRSR.	ELECTRICAL			
	MODEL	LENGTH	DEPTH	HEIGHT	CAP.	HP.	AMPS	VOLTAGE	PHASE	BTUs
STD.	FTFS-24	24"	25"	34-1/2"	80	1/3	7.8	115	SINGLE	—
	FTFS-36	36"	25"	34-1/2"	153	1/3	7.8	115	SINGLE	—
	FTFS-48	48"	25"	34-1/2"	185	1/3	7.8	115	SINGLE	—
REMOTE	FTFR-24	24"	25"	34-1/2"	120	—	4.4	115	SINGLE	—
	FTFR-36	36"	25"	34-1/2"	225	—	4.4	115	SINGLE	—
	FTFR-48	48"	25"	34-1/2"	250	—	4.4	115	SINGLE	—