


VL SERIES



FTB MODELS

Flat Top Bottle Coolers

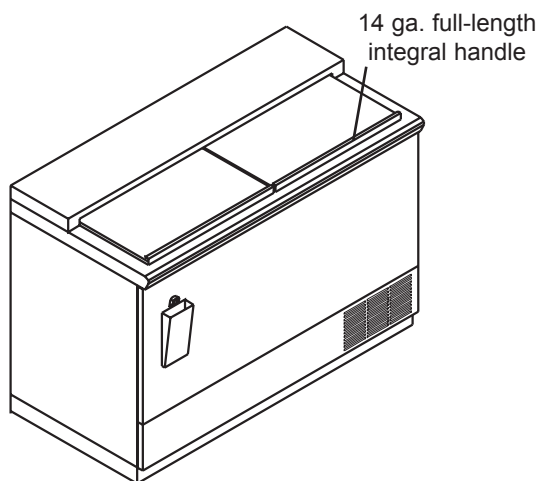

PROJECT _____
 ITEM NO. _____
 QTY. _____
 MODEL NO. _____

	LINE	LENGTH	DOORS	SELF-CONTAINED MODEL	REMOTE MODEL
<input type="checkbox"/>	VL	24"	1	FTBS-24	FTBR-24
<input type="checkbox"/>	VL	36"	1	FTBS-36	FTBR-36
<input type="checkbox"/>	VL	48"	2	FTBS-48	FTBR-48
<input type="checkbox"/>	VL	72"	2	FTBS-72	FTBR-72

STANDARD FEATURES


- **ALL STAINLESS STEEL CONSTRUCTION**
- **ALL WELDED CONSTRUCTION**
- **TOP** - 18 gauge #304 series 18-8 stainless steel.
- **EXTERIOR BODY** - exterior front, sides, back and bottom are 20 gauge stainless steel.
- **INTERIOR** - liner is 20 gauge #304 stainless steel with 3/8 inch radius corner. Sanitation approved for open food containers.
- **DECORATIVE POLISHED BULLNOSE** - 18 gauge #304 s/s.
- **MEGABILT SLIDING LIDS** - all 14 gauge welded #304 18-8 stainless steel with polyurethane shot-in-place foam insulation. Lids easily slide open and closed with exclusive, centered, 14 gauge s/s integral pull with lifetime warranty. Locks provided.
- **BASE PLINTH** - 2-1/2" high 18 gauge #304 18-8 stainless steel base.
- **INSULATION** - 2" thick polyurethane shot-in-place foam (NO CFC's)
- **BREAKER STRIP** - Exclusive Foam-Locked breaker strip permanently installed without mechanical fasteners.
- **PARTITIONS** - adjustable vinyl coated wire partitions.
- **SELF-CONTAINED REFRIGERATION** - R-134A (72" self-contained is R-404A) fully balanced hermetic condensing unit is provided with evaporator coil, TX valve, thermostat, gravity defrost system and condensate evaporator.
- **REMOTE MODELS** - include all of the above with the exception of condensing unit and condensate evaporator pan. Refrigeration, plumbing and electrical will be stubbed out at required location by specifying one of the following: LE-left end, RE-right end, BL-back left, BR-back right. Please advise refrigerant type.
- **BOTTLE OPENER W/ CAP CATCHER**

OPTIONS

- ☐ **CST** ----- casters
- ☐ **6LG** ----- 6" x 1-5/8" stainless steel legs with adjustable bullet feet
- ☐ **BRS-(XX)**- Speed rail (XX=length in inches)
- ☐ **M**----- customized

Model Number Guide

Use this guide to create the model specific to your needs.

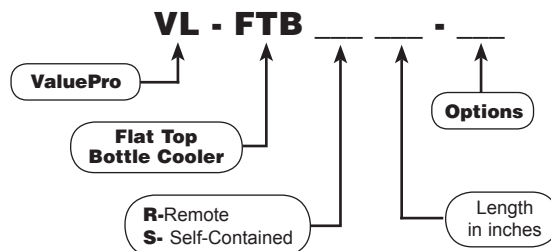


VL SERIES




FTB MODELS


Flat Top Bottle Coolers




FTBS-24




FTBS-36

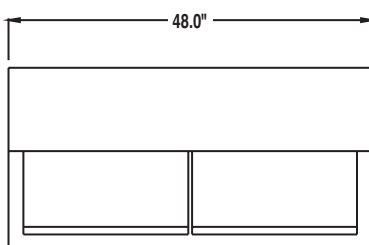


FTBS-48




ELEVATION




ELEVATION

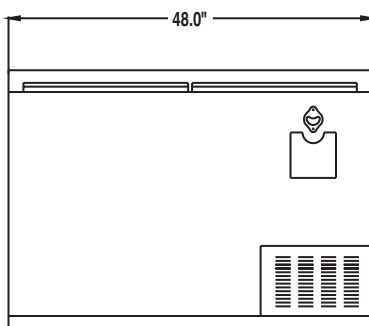


ELEVATION

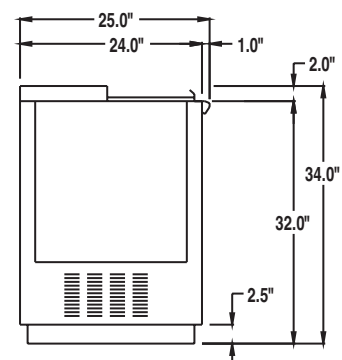

SECTION

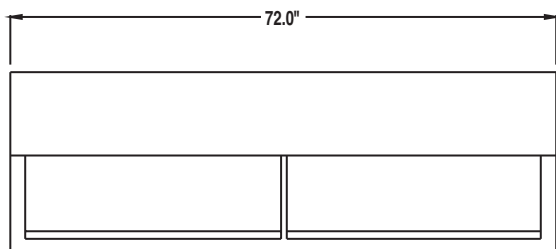

FTBS-72

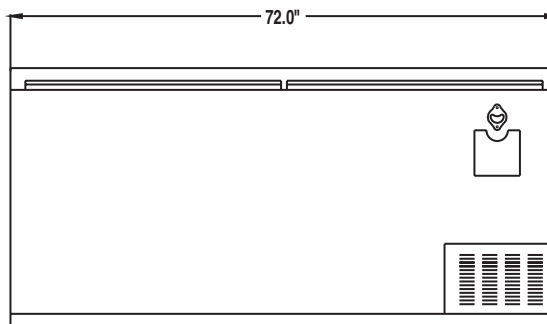

ELEVATION

	MODEL	O.A. DIMENSIONS			CASE	CMPSR.	ELECTRICAL			
		LENGTH	DEPTH	HEIGHT	CAP.	HP.	AMPS	VOLTAGE	PHASE	BTUs
STANDARD	FTBS-24	24"	25"	34-1/2"	6	1/3	9.9	115	SINGLE	—
	FTBS-36	36"	25"	34-1/2"	13	1/3	9.9	115	SINGLE	—
	FTBS-48	48"	25"	34-1/2"	20	1/3	9.9	115	SINGLE	—
	FTBS-72	72"	25"	34-1/2"	43	1/2	12.3	115	SINGLE	—
REMOTE	FTBR-24	24"	25"	34-1/2"	9	—	1.0	115	SINGLE	1000
	FTBR-36	36"	25"	34-1/2"	16	—	2.0	115	SINGLE	1200
	FTBR-48	48"	25"	34-1/2"	23	—	2.0	115	SINGLE	1500
	FTBR-72	72"	25"	34-1/2"	46	—	3.0	115	SINGLE	2500